


Aiopac® Green

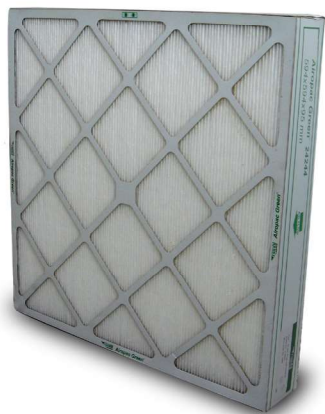

Advantages

- Low pressure drop
- Water resistant beverage board
- Large surface area
- Incinerable
- Rigid design concept
- High dust holding capacity

Application: Air conditioning applications and preparatory filtration in clean rooms

Type: High efficiency compact filter

Frame: Rigid water resistance beverage cardboard

Media: Glass fibre

Separator: Hot-melt beads

Sealant: Polyurethane

Recommended final pressure drop: 450 Pa (suggested economical change point 250 Pa)

Temperature: 70°C maximum in continuous service

Mounting system: Front and side access housing and frames are available

Holding frames: Type 8 and FC Housings

Article Number	Type	EN 779:2012	ISO16890	Dimensions WxHxD (mm)	Air Flow/pressure drop (m³/hr/Pa)	Media area (m²)	Weight (kg)
2700001	3GP-24244-60	M6	ePM10 70%	594x594x95	3400/70	11.8	3
2700002	3GP-20244-60	M6	ePM10 70%	492x594x95	2810/70	9.7	2.5
2700003	3GP-12244-60	M6	ePM10 70%	289x594x95	1645/80	5.7	1.6
2700004	3GP-20204-60	M6	ePM10 70%	492x492x95	2325/75	8	2.1
2700013	3GP-24244-90	F7	ePM1 55%	594x594x95	3400/130	11.8	3.1
2700014	3GP-20244-90	F7	ePM1 55%	492x594x95	2810/130	9.7	2.5
2700015	3GP-12244-90	F7	ePM1 55%	289x594x95	1645/155	5.7	1.6
2700016	3GP-20204-90	F7	ePM1 55%	492x492x95	2325/140	8	2.1
2700025	3GP-24244-95	F8	ePM1 70%	594x594x95	3400/150	11.8	3.1
2700026	3GP-20244-95	F8	ePM1 70%	492x594x95	2810/155	9.7	2.5
2700027	3GP-12244-95	F8	ePM1 70%	289x594x95	1645/175	5.7	1.6
2700028	3GP-20204-95	F8	ePM1 70%	492x492x95	2325/160	8	2.1