

# WD PANEL FILTER

## Washable/Disposable Panel Filters

### Description

Airepure® WD Panel Filters are available in standard and non-standard sizes with efficiencies of G3 for the 8-10mm Filter to G4 for the 20-25mm filter and are suitable for all residential and commercial applications.

The WD Panel Filters are suited to non-critical applications or as a pre-filter to extend the life of the secondary filter. The WD Panel Filter is easily made-up in banks with the use of the appropriate 'F' type holding frame.

### Construction

The 20-25mm WD Panel Filter has a rugged galvanised steel frame that encloses the filter medium between two pieces of galvanised mesh. The corners are mitred and the frame is secured with pop rivets. An aluminium framed version of the WD Panel Filter is also offered.

The filter medium is available in a G4 rating and is manufactured from bonded synthetic fibres, other efficiencies are available upon request.


The 8-10mm WD Panel Filter is has an all aluminium frame with the filter medium being held in place with a plastic spline that is imbedded into a slot in the frame. The filter medium is available in a G3 rating and is manufactured from bonded synthetic fibres as with the 20-25mm WD Panel Filter.

### Maintenance/Serviceing


Washable filters should be hosed from the clean air side and may be washed up to 20 times with care. Before installing back into frames or slides check media for wear or damage and replace filter if necessary.

### Features

- Heavy Duty, 1mm Gal Construction
- Mitred Corners
- Aluminium Version Available
- Washable & Reusable
- Standard and Special Sizes are Available

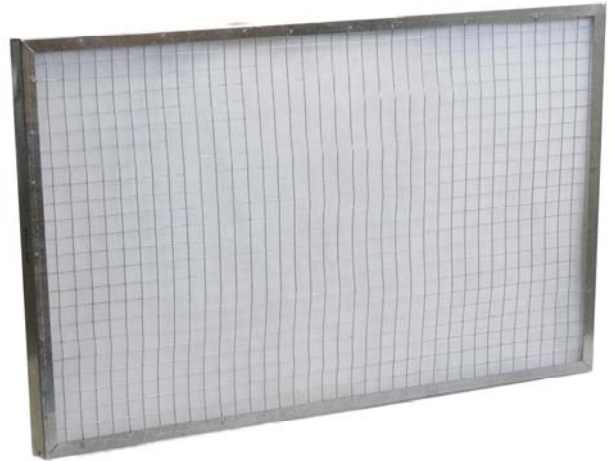

### Resistance of Clean Filter vs Airflow

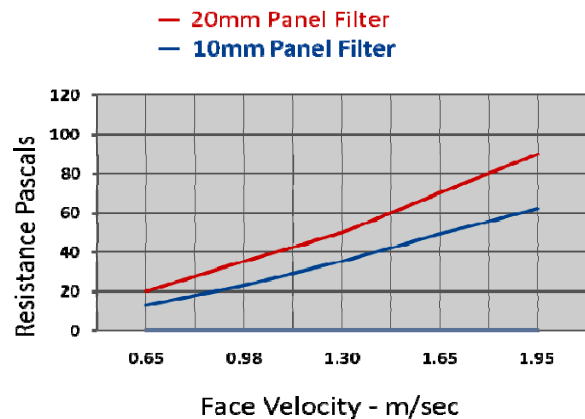

Airepure Australia Pty Ltd

A.B.N. 16 085 671 129

Email: [info@airepure.com.au](mailto:info@airepure.com.au)

Web: [www.airepure.com.au](http://www.airepure.com.au)

The information provided in this brochure is accurate at the time of printing to the best of Airepure Australia's knowledge, however, it should not be relied upon. Circumstances differ with every installation and location therefore suitability of all Airepure products should be confirmed with a qualified Airepure Technical Representative. ©Airepure Australia 2012



Ph. 1300 886 353